



## JDM3 Series Counting Relays

### 1. General

JDM3 electronic counter (hereinafter referred to as the counter), internally powered by lithium battery, is compact in appearance and used for counting in various circuits.

### 2. Type designation

JDM 3 - □ □ □

L: low speed counting, 10 times/second;  
H: high speed counting, 200 times/second.

Blank: without voltage input;  
V: DC voltage input;  
A: AC voltage input.

Counting digits: 6: 6-digit counting;  
8: 8-digit counting.

Design sequence No.


Counter

### 3. Technical data


Power supply	Internal power supply
Battery life	About 6 years(25°C)
Display mode	LCD display, display "0" type (hide "0" type can be customized)
Output mode	No output
Counting digits	6-bit counter or 8-bit counter
Counting rate	10 times/s or 200 times/s
Counting mode	Add count
Without voltage input	None: no voltage input; V: DC voltage input; A: AC voltage input No voltage input (contact input): maximum contact connection resistance: ≤ 10KΩ (count on); Minimum contact breaking resistance: ≥ 500KΩ (count off); Input maximum residual voltage: 0.5V
DC voltage input	DC voltage input (V): DC 0V~2V; H: DC 4V~30V (H valid) (input impedance: ≥ 4.7 kΩ)
AC voltage input	AC voltage input (a): AC/DC 24V~240V
Reset mode	Panel button reset (6 digits), external terminal reset (6 digits & 8 digits)
Reset minimum pulse width	≥ 0.2s
Counting error	≤ ± 1 time
Ambient temp	-5°C ~ +40°C
Installation method	Panel type

#### 4. Wiring diagram


JDM3 (without voltage input)

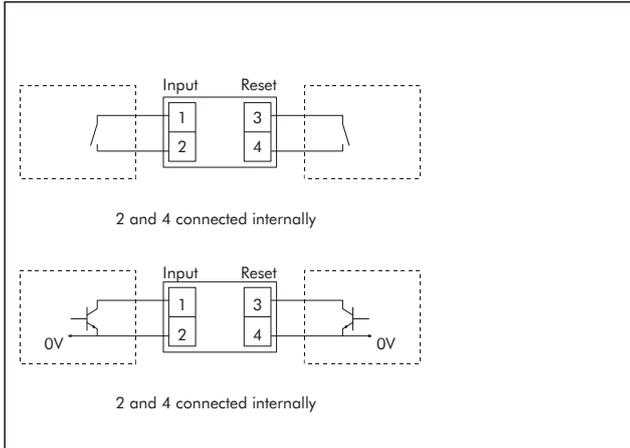



JDM3 (DC voltage input)

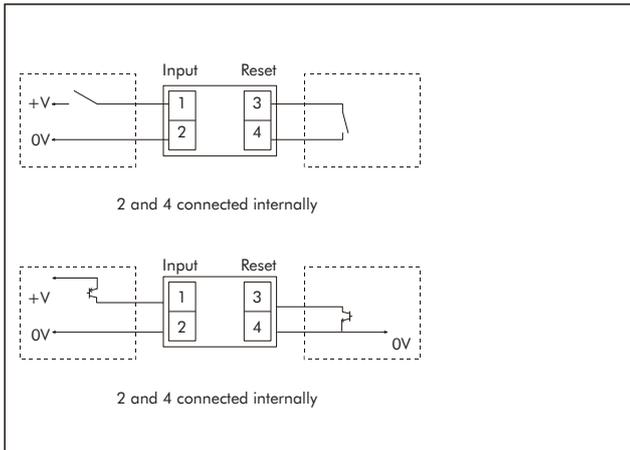


JDM3 (AC voltage input)

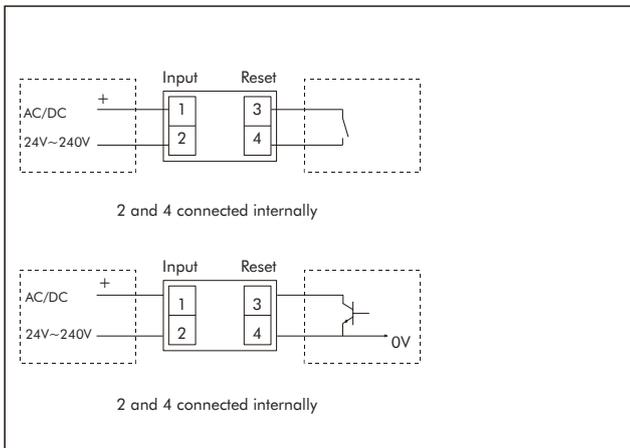

#### 5. Overall and mounting dimensions (mm)

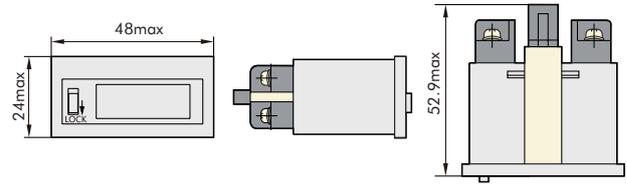

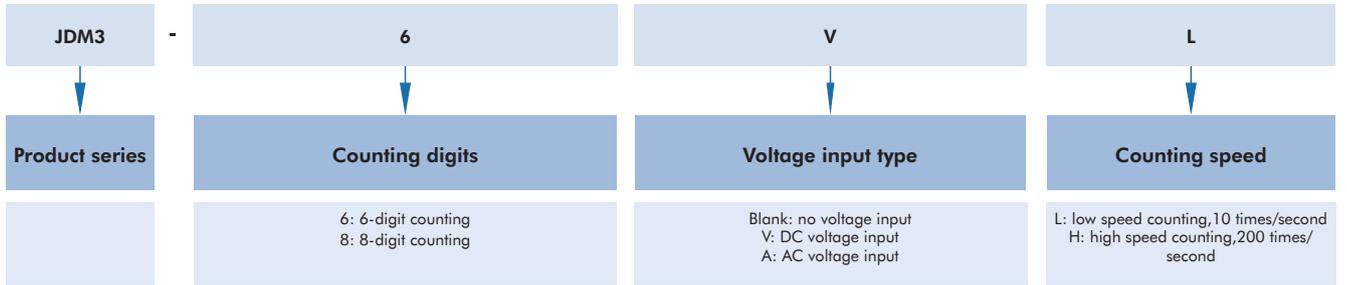

Counting digits	Voltage input	Counting speed	Description	Code
8-digit counting	AC voltage input	10 times/second	JDM3-8AL	304082
6-digit counting	AC voltage input	10 times/second	JDM3-6AL	304078
6-digit counting	no voltage input	200 times/second	JDM3-6H	304079
8-digit counting	no voltage input	200 times/second	JDM3-8H	304083
6-digit counting	no voltage input	10 times/second	JDM3-6L	304040
8-digit counting	no voltage input	10 times/second	JDM3-8L	304084
8-digit counting	DC voltage input	10 times/second	JDM3-8VL	304086
8-digit counting	DC voltage input	200 times/second	JDM3-8VH	304085
6-digit counting	DC voltage input	10 times/second	JDM3-6VL	304081
6-digit counting	DC voltage input	200 times/second	JDM3-6VH	304080