


Specification		EP-16			EP-20			EP-25				EP-32					
Thermal current I <sub>TH</sub>	A	16			20			25				32					
Voltage U <sub>e</sub>	V	110	220	440	110	220	440	110	220	440	500	690	110	220	440	500	690
Rated Operate current																	
AC-21A	A			16			20					25					32
AC-22A	A			16			16					20					32
DC-20	A	16					20				25					32	
Rated Power																	
AC-23A	KW		5	7.5		5	7.5	7.5	11		15		11	18.5			22
AC-3	KW		4	5.5		4	5.5	5.5	7.5		11		7.5	15			18.5
AC-4	KW		2.2	3		2.2	3	2.2	4	4			3	5.5	5.5		
DC-23	KW	0.77			0.77	1.2		2	2.2				2	2.2			

◆外形尺寸和安装尺寸

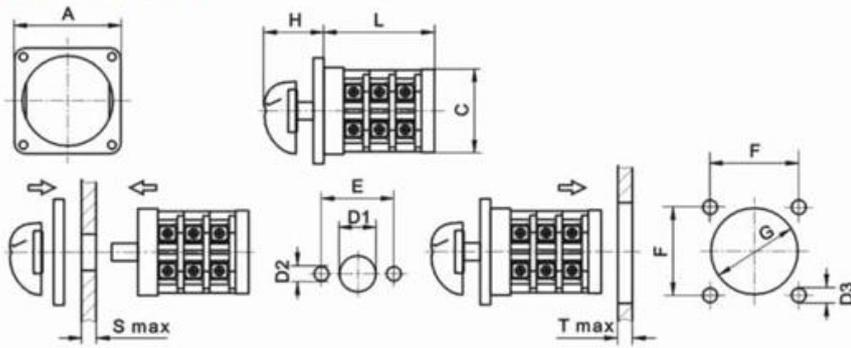

型号规格	Outline (mm)						Install size (mm)					
	A	C	H	L	E	D1	D2	S	F	G	D3	T
EP-16	□48	Φ44	38	25+12n	32	Φ9.5	Φ3.2	1.5	36	Φ45	Φ4.5	6
EP-20	□54	Φ44	38	25+12n	32	Φ9.5	Φ3.2	1.5	36	Φ45	Φ4.5	6
EP-20	□72	Φ44	38	25+12n	32	Φ9.5	Φ3.2	1.5	58	Φ45	Φ4.5	6
EP-25	□72	Φ59	36	25+13n	33	Φ9.5	Φ3.2	1.5	58	Φ64	Φ4.5	6
EP-25	□105	Φ59	53	23+13n	33	Φ9.5	Φ3.2	1.5	85	Φ64	Φ4.5	6
EP-32	□72	Φ59	36	23+18n	33	Φ9.5	Φ3.2	1.5	58	Φ64	Φ4.5	6
EP-32	□105	Φ59	53	23+18n	33	Φ9.5	Φ3.2	1.5	85	Φ64	Φ4.5	6